

EMT Pro Series [PV 60-500Vdc]
8.5 / 11KW 220V / 230Vac Output




Features

- Dual output for smart load management
- Built-in 2 MPPT
- Colored LCD with RGB lights
- Lithium battery activation function by PV or Utility
- Compatible work with LiFePO4 battery via RS485
- Pure Sine Wave
- Power factor 1.0
- PV Input 500Vdc Max
- Built-in MPPT 140A/160A
- Capable to work without battery
- Detachable dust cover for harsh environment
- Wifi remote monitoring optional
- Support multiple output priority: SUB,SBU,SUF
- EQ function to optimize battery performance and extend lifecycle




Bottom view

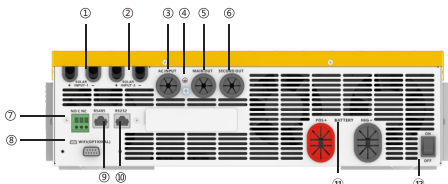

1. Solar input - 1
2. Solar input - 2
3. AC input
4. Grounding
5. Main output
6. Second output
7. Dry contact
8. WiFi(Optional)
9. RS485 communication port
10. RS232 communication port
11. Battery input
12. Power on / off switch

System Diagram

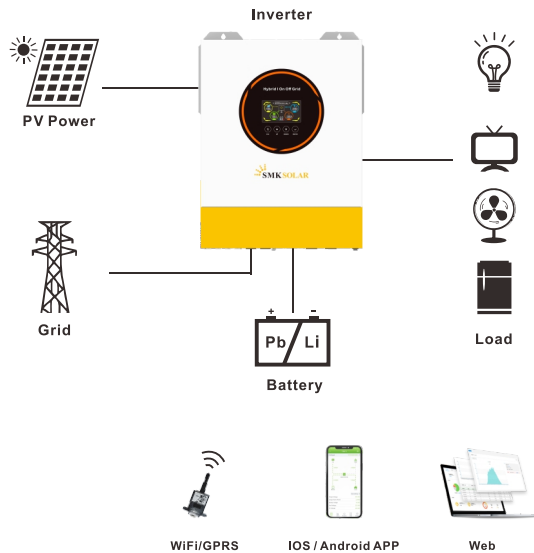

Technical Data

MODEL	EM8500T-48L Pro	EM11000T-48L Pro
Capacity	8.5KVA/8.5KW	11KVA/11KW
Maximum PV Input Power	10KW	11KW
Parallel Capability	NO	NO
Lithium Battery Activation	YES (By PV or Utility)	
Lithium Battery Communication	YES(RS485)	
INPUT		
Nominal Voltage	230VAC	
Acceptable Voltage Range	170-280VAC(For personal Computer);90-280VAC(For Home Appliances)	
Frequency	50/60 Hz (Auto sensing)	
OUTPUT		
Nominal Voltage	220/230/240VAC	
Surge Power	17000VA	22000VA
Frequency	50/60 Hz	
Waveform	Pure Sine wave	
Dual Outputs	YES	
Transfer Time	10ms(For personal Computer);20ms(For Home Appliances)	
Peak Efficiency	94%	
Overload Protection	5s@ > =140% load; 10s@110%~140% load	
Admissible Power Factor	0.6~1 (inductive or capacitive)	
BATTERY		
Battery Voltage	48VDC	48VDC
Maximum Discharge Current	180A	220A
Floating Charge Voltage	54VDC	54VDC
OverCharge Protection	63VDC	63VDC
Charging Method	CC/CV	
SOLAR CHARGER & AC CHARGER		
Solar Charger TYPE	MPPT	MPPT
Max.PV Array Power	5000W*2	5500W*2
Max. PV Array Open Circuit Voltage	500VDC	500VDC
PV Array MPPT Voltage Range	60VDC~500VDC	60VDC~500VDC
Max. Solar Input Current	18A*2	18A*2
Max. Solar Charge Current	140A	160A
Max. AC Charge Current	120A	120A
Max. Charge Current	140A	160A
PHYSICAL		
Dimensions, D x W x H(mm)	540x403x122	540x403x122
Package Dimensions,D x W x H(mm)	637x495x214	637x495x214
Net Weight (Kgs)	14.5	14.8
Communication Interface	RS232/RS485/DRY CONTACT	
LCD	Colorful Screen+RGB Light	
ENVIRONMENT		
Operating Temperature Range	-10°C to 55°C	
Storage temperature	-15°C~ 60°C	
Humidity	5% to 95% Relative Humidity (Non-condensing)	

Product specifications are subject to change without further notice.